

profi-air® pipe systems

profi-air® ISO plus




profi-air ISO plus coupling

NEW

PE coupling for ISO plus system. Suitable for fresh, exhaust, supply and extract air.

- Permissible operating temperature: -25 to 80 °C

| Cat. no. | Description | D1 [mm] | D2 [mm] | D3 [mm] | L [mm] | Weight [kg] | PU [pcs] |
|----------|-------------|------------|------------|------------|-----------|----------------|-------------|
| 78312111 | DN125 | 125 | 156 | 162 | 56 | 0.10 | 6 |
| 78316111 | DN160 | 160 | 191 | 197 | 56 | 0.12 | 6 |

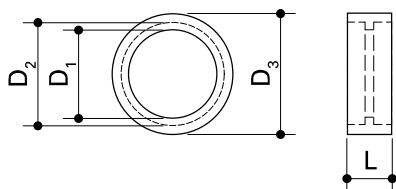

profi-air ISO plus reducer

NEW

Completely insulated and vapour-tight EPS reducer featuring thermal conductivity group 032 to connect profi-air ISO plus pipes and fittings. The profi-air ISO plus reducer is suitable for fresh, exhaust, supply and extract air.

- Permissible operating temperature: -25 to 80 °C

| Cat. no. | Description | D1 [mm] | D2 [mm] | D3 [mm] | D4 [mm] | L [mm] | Weight [kg] | PU [pcs] |
|----------|-------------|------------|------------|------------|------------|-----------|----------------|-------------|
| 78312121 | DN160/DN125 | 191 | 160 | 156 | 125 | 170 | 0.04 | 2 |
| 78316121 | DN180/DN160 | 211 | 180 | 191 | 160 | 200 | 0.05 | 2 |

